



LeanOne Diverger & Tray Turner Multifunctional equipment

CS-25.03

A flexible solution

Diverger to split your product flow from single lane to twin lane. Utilize your tray sealer capacity by easily diverging your products into two lanes. The multifunctional machine can also be changed into an effective tray turner allowing for multiple options to customize it to your production. This standalone machine can be easily integrated into both new and existing production lines. A

flexible solution for transferring your production from manual labor to an automatic solution with a simple automatic machine from QUPAQ's product range.

Main features

- Max tray size is 265 x 325 mm
- Easily integrated into existing production/packing line
- Includes an intelligent electrical control system

- Hygienic design
- Full Electrical Recepti Control system
- Easy, one-minute changeover from one tray size to another



Capacity example

- Tray size 190x144 (500 g)
Diverging 140 trays/min
Tray turning 100 trays/min

Technical specifications LeanOne Diverger & Tray Turner

CS-25.03

Weight of machine	225 kg	Frequency	50 Hz
Tray length - max length	325 mm	Max short circuit current (Ik max)	6 kA
Tray width - max width	300 mm	Operational temperature	32°F-95°F/0°C-60°C
Infeed height	900 mm / -100 / +200	Stock temperature	14°F-140°F/-10°C-60°C
Outfeed height	900 mm / -100 / +200	Humidity	10%-90%
Power supply	3 x 400 VAC+N+PE	Noise level	< 80 dB (A)
Power consumption	3 A	Steel quality	AISI 304
Max fuse	13 A		

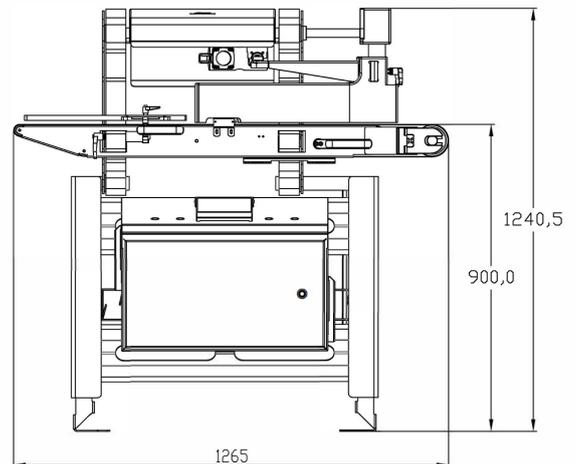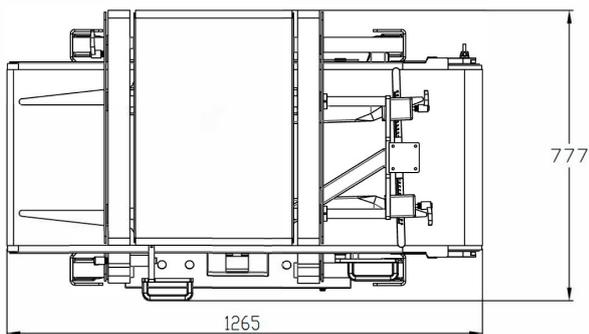

Specifications and photos are intended as a guide and can be changed by QUPAQ without notice. We make reservations for misprints and typing errors.